

LBS

最大工作压力
Maximum Working Pressure
250kpa/36psi (2.5bar)

最大测试压力
Factory Testing Pressure
400kpa/58psi (4.0bar)

最高承受温度
Maximum Temperature
50°C (122F)

建议滤料规格
Size of Gravel
0.5mm~0.8mm (石英砂)




- Made of anti-corrosive reinforced laminated polyester.
- Smooth and high brightness appearance.
- Automatic air bleed inside and air release valve outside.
- can release all interal air safely.

- 由玻璃纤维胶衣造成。
- 缸身光滑、高亮度。
- 内置自动排气管及外置手动排气阀有效安全地释放缸体内部压力和气体。
- 螺丝型砂缸安装起来更牢固。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)
LBS450	450	660	8	0.16	1.5"/50	65
LBS500	530	745	10	0.21	1.5"/50	100
LBS650	630	805	15	0.32	1.5"/50	185
LBS700	700	885	19	0.38	1.5"/50	245
LBS750	750	1000	22	0.44	2"/63	230
LBS800	800	1000	25	0.50	2"/63	260
LBS900	900	1115	32	0.64	2"/63	400

Model	LBS450	LBS500	LBS650	LBS700	LBS750	LBS800	LBS900
ØD(mm)	450	530	635	700	750	800	900
H(mm)	660	745	805	885	1000	1000	1115
A(mm)	260	280	310	360	385	385	430
B(mm)	75	75	95	95	150	150	150
C(mm)	125	125	125	220	220	220	220
ØP(mm)	390	390	565	565	790	790	790
T(mm)	270	310	340	380	400	420	480

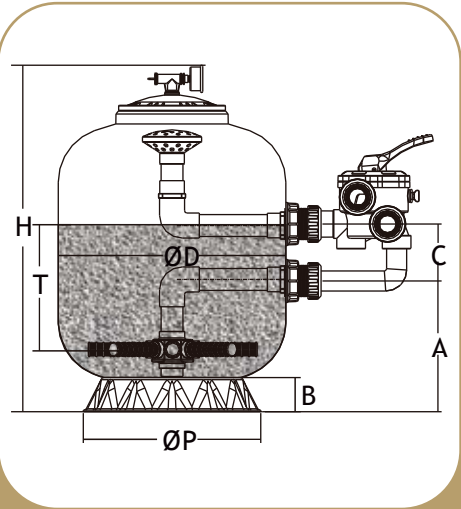

LBS450~LBS900

HLS

最大工作压力
Maximum Working Pressure
250kpa/36psi (2.5bar)

最高承受温度
Maximum Temperature
50°C (122F)

最大测试压力
Factory Testing Pressure
400kpa/58psi (4.0bar)

建议滤料规格
Size of Gravel
0.5mm~0.8mm (石英砂)




- Made of anti-corrosive reinforced laminated polyester, anti-UV and corrosion resistant.
- Smooth and high brightness appearance.
- Automatic air bleed inside and air release valve outside can release all interal air safely.
- 6way multiport valve.
- Sight glass for inspection of filtered water.
- Easy maintenace, easy to clean.

- 外表由耐腐胶衣制成的玻璃纤维缸，具有良好的耐化学腐蚀性能。
- 缸身光滑、颜色艳丽、高亮度。
- 内置自动排气管及外置手动排气阀有效安全地释放缸体内部压力和气体。
- 配备六向阀门。
- 具有监察滤水情况用的清水镜。
- 维护方便，易清洁。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需幼砂重 Sand Weight (mm)	所需粗砂重 Gravel Weight (kg)
HLS13500	540	1350	8	0.20	1.5"/50	220	-
HLS13650	650	1350	12.8	0.32	1.5"/50	300	-
HLS13700	710	1350	15.2	0.38	1.5"/50	420	-
HLS15800	810	1500	20	0.50	2"/63	460	170
HLS15900	910	1500	25.6	0.64	2"/63	600	230
HLS151000	1010	1500	31.6	0.79	2"/63	740	270

Model	HLS13500	HLS13650	HLS13700	HLS15800	HLS15900	HLS151000
ØD(mm)	540	650	710	810	910	1010
H(mm)	1350	1350	1350	1500	1500	1500
A(mm)	750	750	750	900	900	900
B(mm)	75	95	95	150	150	150
C(mm)	125	125	125	220	220	220
ØP(mm)	390	565	565	790	790	790
T(mm)	700	700	700	700	700	700

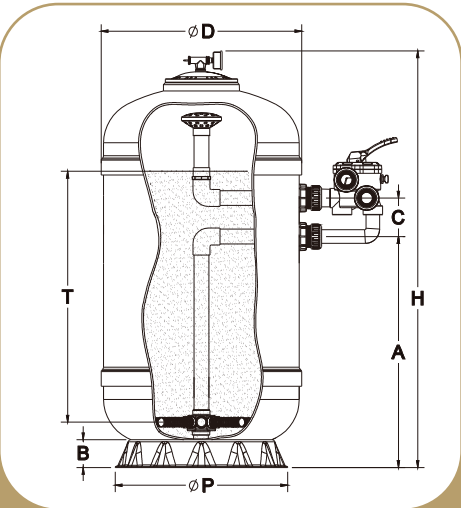

HLS13500~HLS151000

LAMINATED DEPTH SAND FILTER

侧出胶衣
深层过滤器