

FIBERGLASS WITH PLASTIC FILTER SYSTEM

EBW



最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最高承受温度
Maximum Temperature
50℃ (122F)


最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)

建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)

- Fast and easy to install .
 - Specifically sized filter and pump combination.
 - Large pump strainer basket to extend service periods.
 - Union connections for quick installation and servicing.
 - Integrated design safety base.
- 安装方便快捷。
 - 砂缸和水泵的规格匹配恰当。
 - 水泵的毛发收集篮延长使用寿命。
 - 配备易安装拆卸的活接。
 - 一体化设计的安全底座。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EBW350	350	745	5	0.10	1.5"/50	25	STP35
EBW400	400	770	6	0.13	1.5"/50	30	STP50
EBW450	450	815	8	0.16	1.5"/50	45	STP75
EBW500	530	860	10	0.20	1.5"/50	85	STP100
EBW650	630	960	15	0.32	1.5"/50	150	SMP150
EBW700	700	1030	19	0.38	1.5"/50	200	SMP150

Model	EBW350	EB4W00	EBW450	EBW500	EBW650	EBW700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
P(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

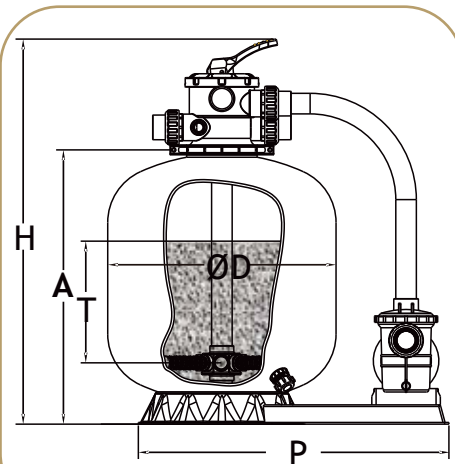

EBW350~EBW700

EBWF



最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)


最高承受温度
Maximum Temperature
50℃ (122F)

建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)

- Fast and easy set-up, ready to install .
 - Specifically sized filter and pump combination.
 - The hair collecting basket of the water pump prolongs the service life
 - Union connections for quick installation and servicing.
 - Integrated design safety base.
 - Enconomic 4-way valve suitable for 14"~28" top mount filters.
- 安装方便快捷。
 - 砂缸和水泵的规格匹配恰当。
 - 水泵的毛发收集篮延长使用寿命。
 - 配备易安装拆卸的活接。
 - 一体化设计的安全底座。
 - 经济型4位阀适用于14"~28"顶出砂缸。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EBWF350	350	645	5	0.10	1.5"/50	25	STP35
EBWF400	400	670	6	0.13	1.5"/50	30	STP50
EBWF450	450	715	8	0.16	1.5"/50	45	STP75
EBWF500	530	760	10	0.20	1.5"/50	85	STP100
EBWF650	630	860	15	0.32	1.5"/50	150	SMP150
EBWF700	700	930	19	0.38	1.5"/50	200	SMP150

Model	EBWF350	EBWF400	EBWF450	EBWF500	EBFW650	EBWF700
ØD(mm)	350	400	450	530	630	700
H(mm)	645	670	715	760	860	930
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	565	570	615	660	760	830
ØP(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

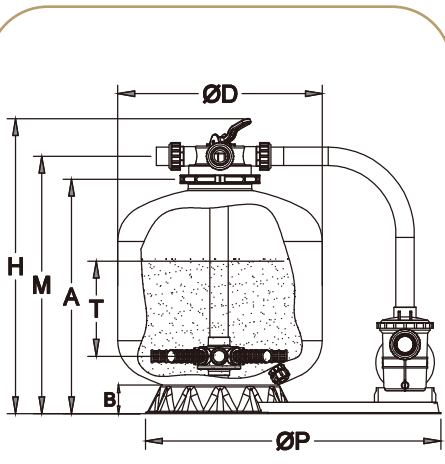

EBWF350~EBWF700

最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)

最高承受温度
Maximum Temperature
50°C (122F)

建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)




- Fast and easy to install .
- Specifically sized filter and pump combination.
- Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
- Integrated design safety base.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的毛发收集篮延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座。

型号 Model I	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EBWH350	350	745	5	0.10	1.5"/50	25	PH033
EBWH400	400	770	6	0.13	1.5"/50	30	PH050
EBWH450	450	815	8	0.16	1.5"/50	45	PH075
EBWH500	530	860	10	0.20	1.5"/50	85	PH100
EBWH650	630	960	15	0.32	1.5"/50	150	PH150
EBWH700	700	1030	19	0.38	1.5"/50	200	PH150

Model	EBWH350	EBWH400	EBWH450	EBWH500	EBWH650	EBWH700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
P(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

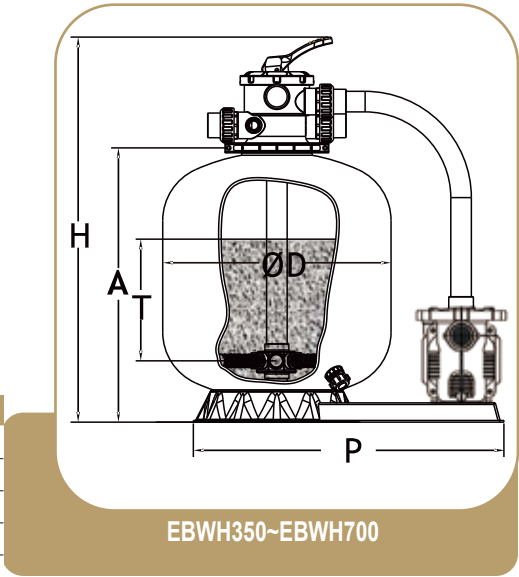

EBWH350~EBWH700

最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)

最高承受温度
Maximum Temperature
50°C (122F)

建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)




- Fast and easy set-up, ready to install .
- Specifically sized filter and pump combination.
- The hair collecting basket of the water pump prolongs the service life
- Union connections for quick installation and servicing.
- Integrated design safety base.
- Enconomic 4-way valve suitable for 14"~28" top mount filters.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的毛发收集篮延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座。
- 经济型4位阀适用于14"~28"顶出砂缸。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EBWFH350	350	645	5	0.10	1.5"/50	25	PH033
EBWFH400	400	670	6	0.13	1.5"/50	30	PH050
EBWFH450	450	715	8	0.16	1.5"/50	45	PH075
EBWFH500	530	760	10	0.20	1.5"/50	85	PH100
EBWFH650	630	860	15	0.32	1.5"/50	150	PH150
EBWFH700	700	930	19	0.38	1.5"/50	200	PH150

Model	EBWFH350	EBWFH400	EBWFH450	EBWFH500	EBWFH650	EBWFH700
ØD(mm)	350	400	450	530	630	700
H(mm)	645	670	715	760	860	930
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	565	570	615	660	760	830
ØP(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

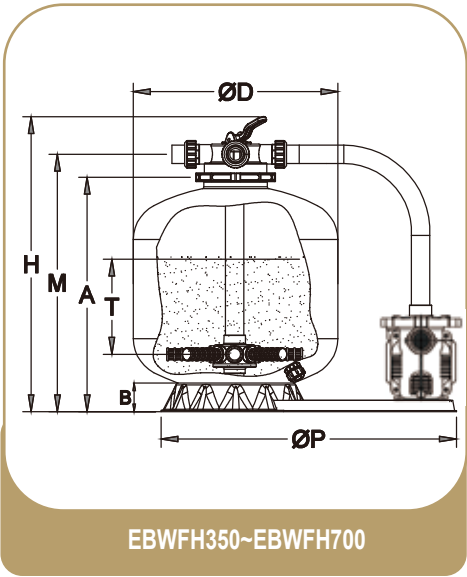

EBWFH350~EBWFH700