

胶缸连泵过滤系统

PLASTIC FILTER SYSTEM

EB



最大工作压力
Maximum Working Pressure
200kpa/30psi (2.0bar)

最高承受温度
Maximum Temperature
50°C (122F)

最大测试压力
Factory Testing Pressure
300kpa/44psi (3.0bar)


建议滤料规格
Size of Gravel
0.5mm~0.8mm (石英砂)

- Fast and easy to install .
- Specifically sized filter and pump combination.
- Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
- Unified pump/filter base for secure system installation.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的超大过滤蓝延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EB350	350	745	5	0.10	1.5"/50	25	STP35
EB400	400	770	6	0.13	1.5"/50	30	STP50
EB450	450	815	8	0.16	1.5"/50	45	STP75
EB500	530	860	10	0.20	1.5"/50	85	STP100
EB650	630	960	15	0.32	1.5"/50	150	SMP150
EB700	700	1030	19	0.38	1.5"/50	200	SMP150

Model	EB350	EB400	EB450	EB500	EB650	EB700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
P(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

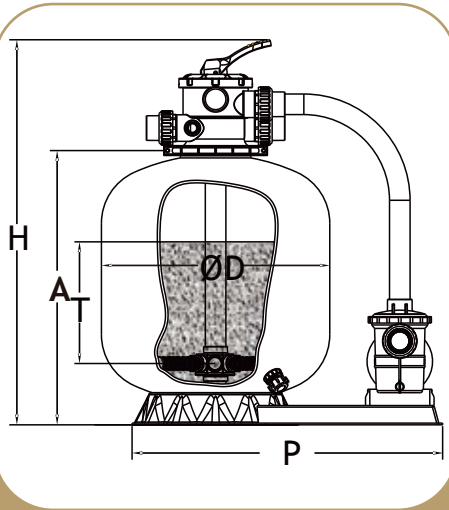

EB350~EB700

EBF



最大工作压力
Maximum Working Pressure
200kpa/30psi (2.0bar)

最大测试压力
Factory Testing Pressure
300kpa/44psi (3.0bar)

最高承受温度
Maximum Temperature
50°C (122F)


建议滤料规格
Size of Gravel
0.5mm~0.8mm (石英砂)

- Fast and easy to install .
- Specifically sized filter and pump combination.
- Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
- Unified pump/filter base for secure system installation.
- Enconomic 4-way valve suitable for 14"~28" top mount filters.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的超大过滤蓝延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座
- 经济型4位阀适用于14"~28"顶出砂缸。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
EBF350	350	645	5	0.10	1.5"/50	25	STP35
EBF400	400	670	6	0.13	1.5"/50	30	STP50
EBF450	450	715	8	0.16	1.5"/50	45	STP75
EBF500	530	760	10	0.20	1.5"/50	85	STP100
EBF650	630	860	15	0.32	1.5"/50	150	SMP150
EBF700	700	930	19	0.38	1.5"/50	200	SMP150

Model	EBF350	EBF400	EBF450	EBF500	EBF650	EBF700
ØD(mm)	350	400	450	530	630	700
H(mm)	645	670	715	760	860	930
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	565	570	615	660	760	830
ØP(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

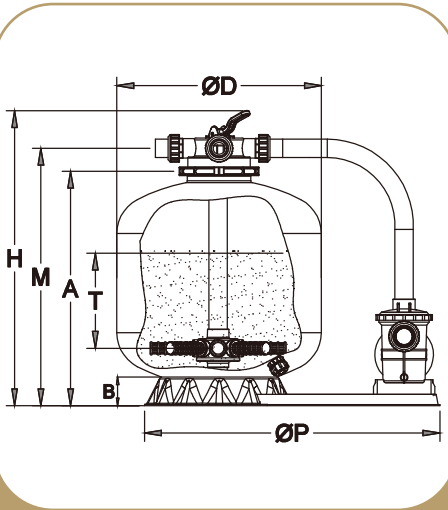

EBF350~EBF700