

纤维砂缸连泵过滤系统

FIBERGLASS SAND FILTER SYSTEM

KB



最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最高承受温度
Maximum Temperature
50°C (122F)

最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)


建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)

- Fast and easy to install .
- Specifically sized filter and pump combination.
- Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
- Unified pump/filter base for secure system installation.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的超大过滤篮延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座。

型号 Model	砂缸直径 Filter Diameter (mm)	砂缸高度 Filter Height (mm)	设计流量 Design Flow (m³/h)	过滤面积 Filter Area (m²)	出入口口径 Connections (inch/mm)	所需砂重 Sand Weight (kg)	匹配水泵 Matching Pump
KB400	400	750	6	0.13	1.5"/50	30	STP50
KB450	450	810	8	0.16	1.5"/50	45	STP75
KB500	530	870	10	0.20	1.5"/50	80	STP100
KB650	630	870	15	0.32	1.5"/50	130	SMP150
KB700	700	960	19	0.38	1.5"/50	190	SMP150

Model	KB400	KB450	KB500	KB650	KB700
ØD(mm)	400	450	530	630	700
H(mm)	750	810	870	890	960
A(mm)	500	560	620	640	710
P(mm)	575	710	710	770	870
T(mm)	160	230	260	300	400

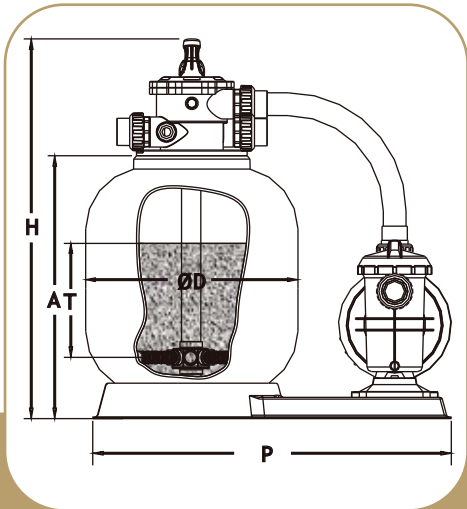

KB400~KB700

KBH



最大工作压力
Maximum Working Pressure
250kpa/36ps i (2. 5bar)

最大测试压力
Factory Testing Pressure
400kpa/58ps i (4. 0bar)

最高承受温度
Maximum Temperature
50°C (122F)


建议滤料规格
Size of Gravel
0. 5mm~0. 8mm (石英砂)

- Fast and easy to install .
- Specifically sized filter and pump combination.
- Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
- Unified pump/filter base for secure system installation.

- 安装方便快捷。
- 砂缸和水泵的规格匹配恰当。
- 水泵的超大过滤篮延长使用寿命。
- 配备易安装拆卸的活接。
- 一体化设计的安全底座。

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
KBH400	400	750	6	0.13	1.5"/50	30	PH050
KBH450	450	810	8	0.16	1.5"/50	45	PH075
KBH500	530	870	10	0.20	1.5"/50	80	PH100
KBH650	630	870	15	0.32	1.5"/50	130	PH150
KBH700	700	960	19	0.38	1.5"/50	190	PH150

Model	KBH400	KBH450	KBH500	KBH650	KBH700
ØD(mm)	400	450	530	630	700
H(mm)	750	810	870	890	960
A(mm)	500	560	620	640	710
P(mm)	575	710	710	770	870
T(mm)	160	230	260	300	400

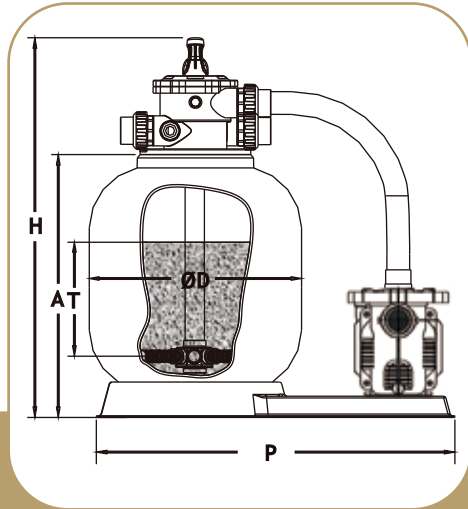

KBH400~KBH700